

Product Name

G

(External driver)

Technical description

G is a Led appliance designed and built to be the ideal lighting solution for industrial environments where high performance is required. Body in die-cast aluminum alloy UNI EN 1706 (Low copper content) painted with polyester powder. Supplied with painted galvanised steel bracket and goniometer in technopolymer with anti-rotation block. Stainless steel screws AISI 304. Tempered glass sodium-calcium type, 5 mm thickness. 91% transparency is guaranteed. Silicone gaskets. LED light source (lumileds), colour temperature (4000 K Neutral White). High coefficient of performance chromatic CRI>80. Optic optical PC.

Supply

External driver in ON-OFF, dimmable o DALI versions. Possibility to remote the driver for special applications  
 Input voltage 220 - 240 V AC 50/60 Hz.  
 Temperature -40° +45°

Installation

Wall and ceiling

Applications

Commercial areas, Industrial areas, Sport facilities, Assembling areas, Street ans subways

Size (mm)



442 x 355 x 260

Colour

Dark grey **4**

Decay of the luminous flux

≥100.000 hr L80B20

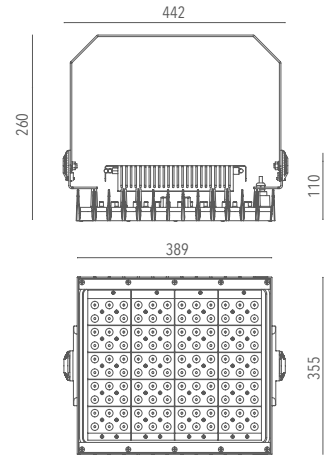

| Code             | Source | Power | Lm (Output) | Lm (Tc=25°) | Temperature | CRI | Beams | Colour    | Control |
|------------------|--------|-------|-------------|-------------|-------------|-----|-------|-----------|---------|
| L000G40HDBL40260 | LED    | 260 W | 38206 lm    | 42380 lm    | 4000 K      | >80 | HD    | Dark grey | -       |
| L000G40HDDI40260 | LED    | 260 W | 38206 lm    | 42380 lm    | 4000 K      | >80 | HD    | Dark grey | Dimmer  |
| L000G40HDDA40260 | LED    | 260 W | 38206 lm    | 42380 lm    | 4000 K      | >80 | HD    | Dark grey | Dali    |

Accessories



Connection kit for slotted cable trays 100 mm  
LKITA00000000010



Connection kit for slotted cable trays 200 mm  
LKITA00000000011



Connection kit for slotted cable trays 300 mm  
LKITA00000000012



Fast connector IP 2 poles  
LKITA00000000017



Fast connector IP 3 poles  
LKITA00000000003



Laser pointer support kit  
LKITA00000000093



Cable with connector Ca. 2 m., Con 2 poles  
LKITA00000000040  
Ca. 2 m., Con 3 poles  
LKITA00000000041



Planar bracket Kit Galvanized iron  
LKITA00000000043  
Inox  
LKITA00000000044

Lanzini indicates the luminous flux of the luminaire in the catalogs with a tolerance of ± 10% respect to the indicated value. The total W indicates the total power absorbed by the LED + power supply system that does not exceed 10% of the indicated value.