

Product Name

G

(External driver)

Technical description

G is a Led appliance designed and built to be the ideal lighting solution for industrial environments where high performance is required. Body in die-cast aluminum alloy UNI EN 1706 (Low copper content) painted with polyester powder. Supplied with painted galvanised steel bracket and goniometer in technopolymer with anti-rotation block. Stainless steel screws AISI 304. Tempered glass sodium-calcium type, 5 mm thickness. 91% transparency is guaranteed. Silicone gaskets. LED light source (lumileds), colour temperature (4000 K Neutral White). High coefficient of performance chromatic CRI>80. Optic optical PC.

Supply

External driver in ON-OFF, dimmable o DALI versions. Possibility to remote the driver for special applications  
 Input voltage 220 - 240 V AC 50/60 Hz.  
 Temperature -40° +45°

Installation

Wall and ceiling

Applications

Commercial areas, Industrial areas, Sport facilities, Assembling areas, Street ans subways

Size (mm)



442 x 355 x 260

Colour

Dark grey **4**

Decay of the luminous flux

≥100.000 hr L80B20

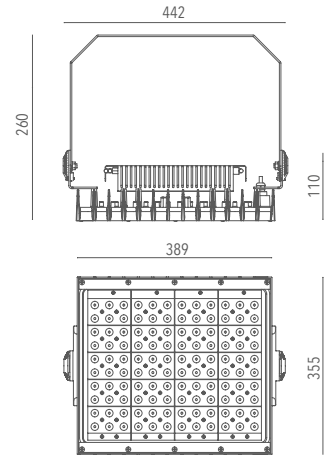

Code	Source	Power	Lm (Output)	Lm (Tc=25°)	Temperature	CRI	Beams	Colour	Control
L000G40HEBL40260	LED	260 W	39144 lm	42380 lm	4000 K	>80	HE	Dark grey	-
L000G40HEDI40260	LED	260 W	39144 lm	42380 lm	4000 K	>80	HE	Dark grey	Dimmer
L000G40HEDA40260	LED	260 W	39144 lm	42380 lm	4000 K	>80	HE	Dark grey	Dali

Accessories

Connection kit for slotted cable trays 100 mm LKITA00000000010	Connection kit for slotted cable trays 200 mm LKITA00000000011	Connection kit for slotted cable trays 300 mm LKITA00000000012	Fast connector IP 2 poles LKITA00000000017	Fast connector IP 3 poles LKITA0000000003	Laser pointer support kit LKITA00000000093	Cable with connector Ca. 2 m., Con 2 poles LKITA00000000040 Ca. 2 m., Con 3 poles LKITA00000000041	Planar bracket Kit Galvanized iron LKITA00000000043 Inox LKITA00000000044

Lanzini indicates the luminous flux of the luminaire in the catalogs with a tolerance of ± 10% respect to the indicated value. The total W indicates the total power absorbed by the LED + power supply system that does not exceed 10% of the indicated value.