

Product Name

G

(External driver)

Technical description

G is a Led appliance designed and built to be the ideal lighting solution for industrial environments where high performance is required. Body in die-cast aluminum alloy UNI EN 1706 (Low copper content) painted with polyester powder. Supplied with painted galvanised steel bracket and goniometer in technopolymer with anti-rotation block. Stainless steel screws AISI 304. Tempered glass sodium-calcium type, 5 mm thickness. 91% transparency is guaranteed. Silicone gaskets. LED light source (lumileds), colour temperature (4000 K Neutral White). High coefficient of performance chromatic CRI>80. Optic optical PC.

Supply

External driver in ON-OFF, dimmable o DALI versions. Possibility to remote the driver for special applications. Input voltage 220 - 240 V AC 50/60 Hz. Temperature -40° +45°

Installation

Wall and ceiling

Applications

Commercial areas, Industrial areas, Sport facilities, Assembling areas, Street ans subways

Size (mm)


442 x 355 x 260

Colour


Dark grey **4**

Decay of the luminous flux

≥100.000 hr L80B20

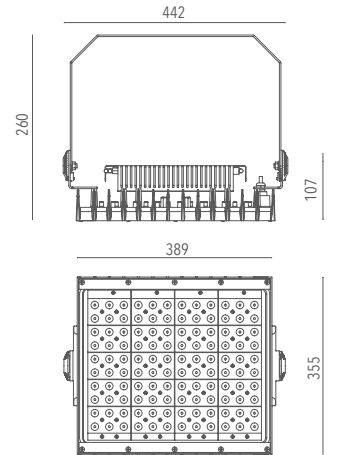

Perimetral lighting



Code	Source	Power	Lm (Output)	Lm (Tc=25°)	Temperature	CRI	Beams	Colour	Control
L000G40HHBL40220	LED	220 W	33650 lm	35860 lm	4000 K	>80	HH	Dark grey	-
L000G40HHDI40220	LED	220 W	33650 lm	35860 lm	4000 K	>80	HH	Dark grey	Dimmer
L000G40HHDA40220	LED	220 W	33650 lm	35860 lm	4000 K	>80	HH	Dark grey	Dali

Accessories



Connection kit for slotted cable trays 100 mm LKITA00000000010



Connection kit for slotted cable trays 200 mm LKITA00000000011



Connection kit for slotted cable trays 300 mm LKITA00000000012



Fast connector IP 2 poles LKITA00000000017



Fast connector IP 3 poles LKITA00000000003



Laser pointer support kit LKITA00000000093



Cable with connector Ca. 2 m., Con 2 poles LKITA00000000040 Ca. 2 m., Con 3 poles LKITA00000000041



Planar bracket Kit Galvanized iron LKITA00000000043 Inox LKITA00000000044

Lanzini indicates the luminous flux of the luminaire in the catalogs with a tolerance of ± 10% respect to the indicated value. The total W indicates the total power absorbed by the LED + power supply system that does not exceed 10% of the indicated value.