

Product Name

P

Technical description

Waterproof ceiling fittings in high-quality polycarbonate. Many fixing possibilities and strenght of the materials make P a durable and reliable solution for industrial and commercial applications.  
 Body in PC technopolymer. Hinges and wires for suspension in Stainless Steel AISI 304. Optical PC diffuser. Expanded silicone gaskets.  
 LED light source (lumileds), colour temperature (4000 K Neutral White).  
 High coefficient of performance chromatic CRI>80.

Supply

Driver included in the linear version.  
 Voltage 220-240V AC 50 / 60Hz.  
 Operating temperature -30° + 45°.  
 Fast-serial installation connector.

Installation

Wall, ceiling and suspended.

Applications


Indoor parking, offices, supermarkets and storage areas.

Size (mm)

1335x128x84

Colour

Grey 2

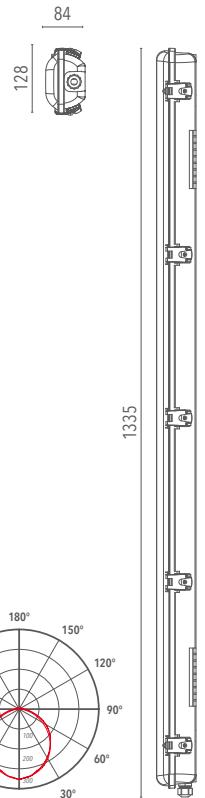

**IP65**
**2,8 Kg**

C0 / C180 C90 / C270

| Code                    | Source | Power | Lm (Output) | Lm (Tc=25°) | Temperature | CRI | Beams | Colour | Control |
|-------------------------|--------|-------|-------------|-------------|-------------|-----|-------|--------|---------|
| <b>L000P40DRBL20036</b> | LED    | 36 W  | 4572 lm     | 5420 lm     | 4000 K      | >80 | -     | Grey   |         |

Accessories



Emergency kit  
LKITA00000000083



Suspension kit  
LKITA00000000085

Lanzini indicates the luminous flux of the luminaire in the catalogs with a tolerance of ± 10% respect to the indicated value. The total W indicates the total power absorbed by the LED + power supply system that does not exceed 10% of the indicated value.