

Product Name

P

Technical description

Waterproof ceiling fittings in high-quality polycarbonate. Many fixing possibilities and strenght of the materials make P a durable and reliable solution for industrial and commercial applications.
 Body in PC technopolymer. Stainless steel hooks for wall mounting and suspension are included in the package. Optical PC diffuser.
 Expanded silicone gaskets.
 LED light source (lumileds), colour temperature (5000 K).
 High coefficient of performance chromatic CRI>80.

Supply

Driver included in the linear version.
 Voltage 220-240V AC 50 / 60Hz.
 Operating temperature -20° + 45°.
 Fast-serial installation connector.

Installation

Wall, ceiling and suspended.

Applications



Indoor parking, offices, supermarkets and storage areas.

Size (mm)

730x128x84

Colour

Grey 2

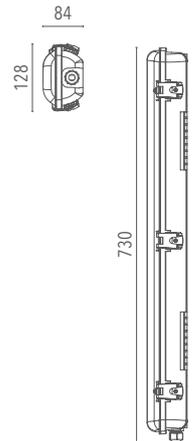

C0 / C180 C90 / C270



IP65

IK08



1,4 Kg

Low Flicker



Code	Source	Power	Lm (Output)	Lm (Tc=25°)	Temperature	CRI	Beams	Colour	Control
L000P50DRBL20018	LED	18 W	2286 lm	2710 lm	5000 K	>80	-	Grey	-
L000P50DREM20018	LED	18 W	2286 lm	2710 lm	5000 K	>80	-	Grey	Emergency

Accessories



Emergency kit
LKITA00000000083



Suspension kit
LKITA00000000188



Suspension hooks
LKITA00000000085

Lanzini indicates the luminous flux of the luminaire in the catalogs with a tolerance of ± 10% respect to the indicated value. The total W indicates the total power absorbed by the LED + power supply system that does not exceed 10% of the indicated value.