

Product Name

P

Technical description

Waterproof ceiling fittings in high-quality polycarbonate. Many fixing possibilities and strenght of the materials make P a durable and reliable solution for industrial and commercial applications.
 Body in PC technopolymer. Stainless steel hooks for wall mounting and suspension are included in the package. Optical PC diffuser.
 Expanded silicone gaskets.
 LED light source (lumileds), colour temperature (5000 K).
 High coefficient of performance chromatic CRI>80.

Supply

Driver included in the linear version.
 Voltage 220-240V AC 50 / 60Hz.
 Operating temperature -20° + 45°.
 Fast-serial installation connector.

Installation

Wall, ceiling and suspended.

Applications



Indoor parking, offices, supermarkets and storage areas.

Size (mm)

1335x128x84

Colour

Grey **2**

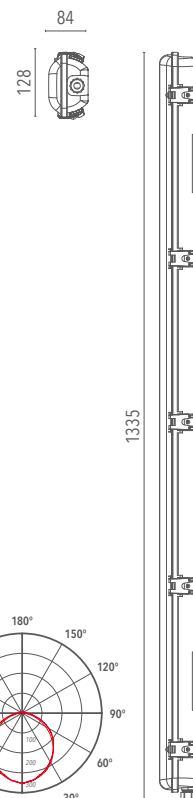

C0 / C180 C90 / C270



IP65

IK08



2,2 Kg

Low Flicker

LED

Code	Source	Power	Lm (Output)	Lm (Tc=25°)	Temperature	CRI	Beams	Colour	Control
L000P50DRBL20036	LED	36W	4572 lm	5420 lm	5000 K	>80	-	Grey	-
L000P50DREM20036	LED	36W	4572 lm	5420 lm	5000 K	>80	-	Grey	Emergency

Accessories



Emergency kit
LKITA000000000083



Suspension kit
LKITA000000000188



Suspension hooks
LKITA000000000085