

Product Name

R

(External driver)

Technical description

This fitting has a goniometer that allows users to set the fitting at various angles, satisfying different lighting requirements. R using minimal lines lightens the environments revealing its full potential. Body in die-cast aluminum alloy UNI EN 1706 (Low copper content) painted with polyester powder. With bracket painted steel and goniometer in technopolymer PA66. Stainless steel screws AISI 304. Silicone gaskets. On request, tempered glass sodium-calcium type, 3 mm thickness, 91% transparency and IK07. LED light source (lumileds), colour temperature (4000 K Neutral White). High coefficient of performance chromatic CRI>80. Optic in optical PC.

Supply

External driver in ON-OFF, dimmable or DALI. Voltage 220-240V AC 50/60Hz. Temperature -40° +45°

Installation

Wall and ceiling.

Applications

Churches, Museums, Shop windows, Facades decoration, Fair exhibitions

Size (mm)




250 x 176 x 89

Colour

Dark grey 4

Decay of the luminous flux

≥100.000 hr L85B15

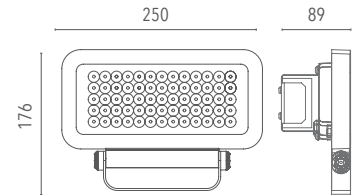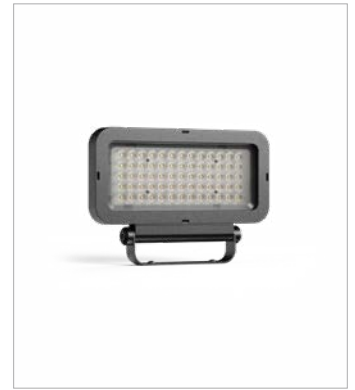

Code	Source	Power	Lm (Output)	Lm (Tc=25°)	Temperature	CRI	Beams	Colour	Control
L000R4060BL40050	LED	50 W	6050 lm	8550 lm	4000 K	>80	60°	Dark grey	-
L000R4060DI40050	LED	50 W	6050 lm	8550 lm	4000 K	>80	60°	Dark grey	Dimmer
L000R4060DA40050	LED	50 W	6050 lm	8550 lm	4000 K	>80	60°	Dark grey	DALI

Accessories



Cable with connector
Ca. 2m/Co. IP 2 poli
LKITA00000000040
Ca. 2m/Co. IP 3 poli
LKITA00000000041



Ceiling Kit
LKITA00000000060
Galvanised iron
LKITA00000000061
Inox



Pole connection A
Max 4 x R
LKITA00000040001



Fast connector
IP 2 poles
LKITA00000000017



Fast connector
IP 3 poles
LKITA00000000003



Pole connection B
LKITA00000040109

Lanzini indicates the luminous flux of the luminaire in the catalogs with a tolerance of ± 10% respect to the indicated value. The total W indicates the total power absorbed by the LED + power supply system that does not exceed 10% of the indicated value.