

Product Name

R

(External driver)

Technical description

Body in die-cast aluminum alloy UNI EN 1706 painted with polyester powder. Supplied with a painted galvanised steel bracket and goniometer in die-cast aluminum and powder painted. Screws made of 18/10 stainless steel. Silicone gaskets.
LED light source (lumileds), colour temperature (4000 K Neutral White).
High coefficient of performance chromatic CRI>80. Optic in optical PC.



Supply

External driver in ON-OFF, dimmable or DALI.
Voltage 220-240V AC 50/60Hz.
Temperature -40° +45°

Installation

Wall and ceiling.

Applications

Churches, Museums, Shop windows, Facades decoration, Fair exhibitions

Size (mm)


250 x 176 x 89

Colour


Dark grey 4

Decay of the luminous flux

≥100.000 hr L90B10

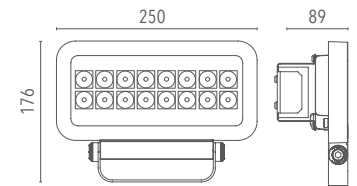

Perimeter lighting



Code	Source	Power	Lm (Output)	Lm (Tc=25°)	Temperature	CRI	Beams	Colour	Control
L000R40HBBL40050	LED	50 W	5500 lm	8000 lm	4000 K	>80	HB	Dark grey	-
L000R40HBDI40050	LED	50 W	5500 lm	8000 lm	4000 K	>80	HB	Dark grey	Dimmer
L000R40HBDA40050	LED	50 W	5500 lm	8000 lm	4000 K	>80	HB	Dark grey	DALI

Accessories



Cable with connector
Ca. 2m/Co. IP 2 poli
LKITA00000000040
Ca. 2m/Co. IP 3 poli
LKITA00000000041



Ceiling Kit
LKITA00000000060
Galvanised iron
LKITA00000000061
Inox



Pole connection A
Max 4 x R
LKITA00000040001



Fast connector
IP 2 poles
LKITA00000000017



Fast connector
IP 3 poles
LKITA00000000003



Pole connection B
LKITA00000040109

Lanzini indicates the luminous flux of the luminaire in the catalogs with a tolerance of ± 10% respect to the indicated value. The total W indicates the total power absorbed by the LED + power supply system that does not exceed 10% of the indicated value.