

Product Name

FLAT

Technical description

Waterproof ceiling fittings in high-quality polycarbonate. Many fixing possibilities and strenght of the materials make Flat a durable and reliable solution for industrial and commercial applications.
 Body in PC technopolymer. Hinges and wires for suspension in Stainless Steel AISI 304. Optical PC diffuser. Expanded silicone gaskets.
 LED light source (lumileds), colour temperature (4000 K Neutral White).
 High coefficient of performance chromatic CRI>80.



Supply

Driver included.
 Voltage 220-240V AC 50 / 60Hz.
 Operating temperature -20° + 40°.
 Fast-serial installation connector.

Installation

Wall, ceiling and suspended.

Applications



Indoor parking, offices, supermarkets and storage areas.

Size (mm)

1571 x 110 x 53

Colour

Grey 2

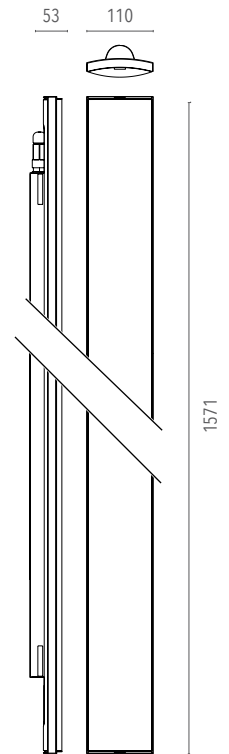

□
CE
IP65
IK08 MAX
1,04Kg
Low Flicker
F
U.V.
LED

Code	Source	Power	Lm (Output)	Lm (Tc=25°)	Temperature	CRI	Beams	Colour	Control
L00FL40LUBL20060*	LED	60 W	8272lm	9800 lm	4000 K	>80	-	Grigio	-
L00FL40LUF20060	LED	60 W	8272lm	9800 lm	4000 K	>80	-	Grigio	Continuous row
L00FL40LUDA20060	LED	60 W	8272lm	9800 lm	4000 K	>80	-	Grigio	DALI
L00FL40LUEM20060	LED	60 W	8272lm	9800 lm	4000 K	>80	-	Grigio	Emergency

*Available while stocks last

Lanzini indicates the luminous flux of the luminaire in the catalogs with a tolerance of ± 10% respect to the indicated value. The total W indicates the total power absorbed by the LED + power supply system that does not exceed 10% of the indicated value.