

Product Name

T1

(External driver)


Technical description

T1 circular shaped LED suspension and clean design. Corresponds to the perfect identikit of the next generation lighting fitting to replace traditional ones. Body in die cast aluminum alloy UNI EN 1706 (Low copper content) painted with polyester powder and stainless steel eye-bolt. Available on request, tempered glass of sodium calcic type, thickness 4mm, 91% transparency and IK07 with silicone gaskets, galvanized steel bracket painted with polyester powder, goniometer in technopolymer. Screws made of AISI 304 stainless steel. LED light source (lumileds), colour temperature (4000 K Neutral White). High coefficient of performance chromatic CRI>80. Optic in PC optic.



Supply

Driver included external toroidal (also in dimmable or DALI versions)
Voltage 220-240V AC 50/60Hz.
Temperature -40° +45°

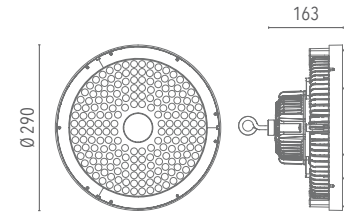

Installation

Wall, ceiling and suspended.

Applications


Industrial installations, Warehouses / deposits, Gyms

Size (mm)

Ø 290 x 163

Colour

Dark grey 4



C0 / C180 C90 / C270


Decay of the luminous flux

≥100.000 hr L85B15



Code	Source	Power	Lm (Output)	Lm (Tc=25°)	Temperature	CRI	Beams	Colour	Control
L00T14090BL40175	LED	175 W	21563 lm	29925 lm	4000 K	>80	90°	Dark grey	-
L00T14090DI40175	LED	175 W	21563 lm	29925 lm	4000 K	>80	90°	Dark grey	Dimmer
L00T14090DA40175	LED	175 W	21563 lm	29925 lm	4000 K	>80	90°	Dark grey	DALI

Accessories



Sodic-calcic glass with spacers
LKITV00000000004



Wall/Ceiling kit
LKITA00000000015



Fast connector IP 2 poles
LKITA00000000017



Fast connector IP 3 poles
LKITA00000000003



Cable with connector
Ca. 2 m., Con 2 poles
LKITA00000000040
Ca. 2 m., Con 3 poles
LKITA00000000041

Lanzini indicates the luminous flux of the luminaire in the catalogs with a tolerance of ± 10% respect to the indicated value. The total W indicates the total power absorbed by the LED + power supply system that does not exceed 10% of the indicated value.