

Product Name

# T2

(External driver)

Technical description

T2 is born from the concept of T-Series fittings, from the need to reach high watts while maintaining the characteristic circular shape. Body in die-cast aluminum UNI EN 1706 (Low copper content) alloy with polyester powder coating and eye-bolt in M8 galvanized steel. Tempered glass of sodium calcic type, thickness 5 mm, 91% transparency and IK08 with silicone gaskets. Available on request, epoxy polyester powder coated galvanized steel bracket, technopolymer goniometer. Screws made of AISI 304 stainless steel.  
LED light source (lumileds), colour temperature (4000 K Natural White).  
High coefficient of performance chromatic CRI>80. Optic in PC optic.



Supply

Driver included external toroidal (also in dimmable or DALI versions)  
Voltage 220-240V AC 50/60Hz.  
Temperature -40° +45°

Installation

Wall, ceiling and suspended.

Applications

Industrial installations, Warehouses / deposits, Large storage areas, Heavy industry

Size (mm)



Ø400 x 135

Colour

Dark grey 4

Decay of the luminous flux

≥100.000 hr L85B15

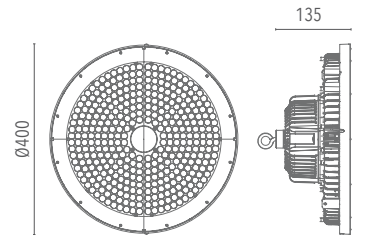

C0 / C180 C90 / C270



Code	Source	Power	Lm (Output)	Lm (Tc=25°)	Temperature	CRI	Beams	Colour	Control
L00T24060BL40260	LED	260 W	37069 lm	44460 lm	4000 K	>80	60°	Dark grey	-
L00T24060DI40260	LED	260 W	37069 lm	44460 lm	4000 K	>80	60°	Dark grey	Dimmer
L00T24060DA40260	LED	260 W	37069 lm	44460 lm	4000 K	>80	60°	Dark grey	DALI

Accessories



Fast connector  
IP 2 poles  
LKITA00000000017



Fast connector  
IP 3 poles  
LKITA00000000003



Wall/ Ceiling kit  
LKITA00000000016



Cable with  
connector  
LKITA00000000040  
LKITA00000000041



Emergency Kit  
LKITA00000000095

Lanzini indicates the luminous flux of the luminaire in the catalogs with a tolerance of ± 10% respect to the indicated value. The total W indicates the total power absorbed by the LED + power supply system that does not exceed 10% of the indicated value.