

Product Name

4R2

(External driver)

Technical description

4R2 is the ideal floodlight to replace the old 2000W JM, thanks to the modular use of 4 pcs of R2 floodlights. This configuration allows to reach a very important lighting power, suitable for the most demanding applications. Body in die-cast aluminum alloy UNI EN 1706 (Low copper content) painted polyester powder. Supplied with a painted galvanised steel bracket. Stainless steel screws AISI 304. Tempered glass sodium-calcium type, 5 mm thickness, 91% transparency is guaranteed. Silicone gaskets. LED light source (lumileds), colour temperature (4000 K Neutral White). High coefficient of performance chromatic CRI>80. Optic in optical PC.

Supply

External driver (also in versions dimmable or DALI)
Voltage 220-240V AC 50/60Hz.
Temperature -40° +45°

Installation

Wall, Headlight tower

Applications

Industrial areas, Sport facilities, Assembling areas, Headlight tower

Size (mm)




966 x 577 x 370

Colour

Dark grey **4**

Decay of the luminous flux

≥100.000 hr L85B15

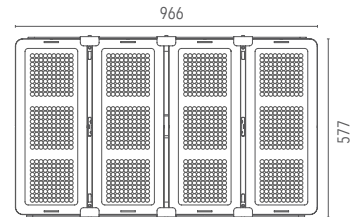

Code	Source	Power	Lm (Output)	Lm (Tc=25°)	Temperature	CRI	Beams	Colour	Control
L04R240A1BL41200_001	LED	1200 W	151170 lm	205200 lm	4000 K	>80	A1	Dark grey	-
L04R240A1DI41200_001	LED	1200 W	151170 lm	205200 lm	4000 K	>80	A1	Dark grey	Dimmer
L04R240A1DA41200_001	LED	1200 W	151170 lm	205200 lm	4000 K	>80	A1	Dark grey	DALI

Accessories



LANZINI indicates the luminous flux of the luminaire in the catalogs with a tolerance of ± 10% respect to the indicated value. The total W indicates the total power absorbed by the LED + power supply system that does not exceed 10% of the indicated value.