

Product Name

5R2

(External driver)

Technical description

5R2 is the most powerful floodlight in the current Lanzini range and resumes its high innovative capacity combined with excellent luminous efficiency. Body in die-cast aluminum alloy UNI EN 1706 (Low copper content) painted polyester powder. Supplied with a painted galvanised steel bracket. Stainless steel screws AISI 304. Tempered glass sodium-calcium type, 5 mm thickness, 91% transparency is guaranteed. Silicone gaskets. LED light source (lumileds), colour temperature (4000 K Neutral White). High coefficient of performance chromatic CRI>80. Optic in optical PC.

Supply

External driver (also in versions dimmable or DALI)
Voltage 220-240V AC 50/60Hz.
Temperature -40° +45°

Installation

Wall, Headlight tower

Applications

Industrial areas, Sport facilities, Assembling areas, Big parking

Size (mm)




1209 x 572 x 370

Colour

Dark grey 4

Decay of the luminous flux

≥100.000 hr L80B20

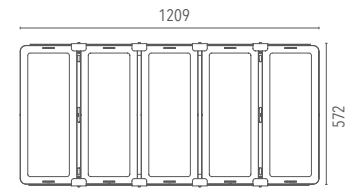

Code	Source	Power	Lm (Output)	Lm (Tc=25°)	Temperature	CRI	Beams	Colour	Control
L05R240A10141250	LED	1250 W	162500 lm	210000 lm	4000 K	>80	ASIM 45°	Dark grey	-
L05R240A10241250	LED	1250 W	162500 lm	210000 lm	4000 K	>80	ASIM 45°	Dark grey	Dimmer
L05R240A10341250	LED	1250 W	162500 lm	210000 lm	4000 K	>80	ASIM 45°	Dark grey	DALI

Accessories



Fast connector IP 2 poles
LKITA00000000017



Fast connector IP 3 poles
LKITA00000000003



Fast connector IP 5 poles
LKITA00000000103

Lanzini indicates the luminous flux of the luminaire in the catalogs with a tolerance of ± 10% respect to the indicated value. The total W indicates the total power absorbed by the LED + power supply system that does not exceed 10% of the indicated value.