

Product Name

P - HP

(High Performance)

Technical description

Waterproof ceiling fittings in high-quality polycarbonate. Many fixing possibilities and strenght of the materials make P a durable and reliable solution for industrial and commercial applications.
 Body in PC technopolymer. Stainless steel hooks for wall mounting and suspension are included in the package. Optical PC diffuser.
 Expanded silicone gaskets.
 LED light source (lumileds), colour temperature (4000 K Neutral White).
 High coefficient of performance chromatic CRI>80.

Supply

Driver included in the linear version.
 Voltage 220-240V AC 50 / 60Hz.
 Operating temperature -30° + 45°.
 Fast-serial installation connector.

Installation

Wall, ceiling and suspended.

Applications



Indoor parking, offices, supermarkets and storage areas.

Size (mm)

1335 x128x84

Colour

Grey 2

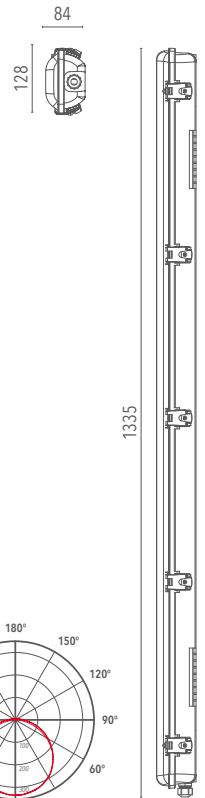

C0 / C180 C90 / C270



IP65

IK08

2,8 Kg

Low Flicker

LED

Code	Source	Power	Lm (Output)	Lm (Tc=25°)	Temperature	CRI	Beams	Colour	Control
L0PHP40DRBL20040	LED	40 W	5400 lm	6160 lm	4000 K	>80	-	Grey	

Accessories



Emergency kit
 LKITA00000000083

Lanzini indicates the luminous flux of the luminaire in the catalogs with a tolerance of ± 10% respect to the indicated value. The total W indicates the total power absorbed by the LED + power supply system that does not exceed 10% of the indicated value.