

# Billet

## L10 210A7 \_

### Technical description

Adjustable LED fitting for floor /wall use and/or with stake complete with bracket, extremely robust , with high IP protection, suitable for pointing lighting for indoor and outdoor use. This fitting is equipped with integrated LED modules.

Body made of aluminium obtained directly from solid, complete with tempered glass soft lens diffuser, without any protusion, stainless steel screws AISI 304. Silicone rubber gasket that ensures a high resistance to water splashes. Paint with high resistance to external agents.

LED light source and colour temperature (3000K).

Very high coefficient of rendering >80CRI.

### Supply

Driver included.

Input voltage 220-240 VAC/50-60Hz

Temperature -20° +40°

Life 30000h / 25°

### Installation

Recessed for outdoor

### Size (mm)




42 x 72 x 75

### Color

Alluminium **6**



IP67

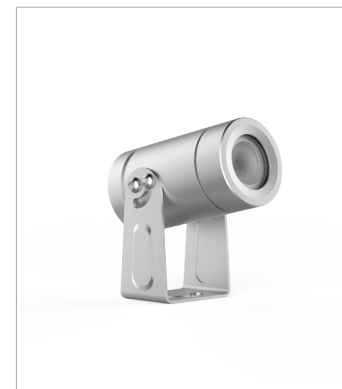

| Code        | Source | Power | Luminous Flux | Temperature | CRI | Beams | Color      |
|-------------|--------|-------|---------------|-------------|-----|-------|------------|
| L10 210A7 6 | LED    | 3 W   | 300 lm        | 3000 K      | >80 | 30°   | Alluminium |

### Accessories



Stake  
L92 011000



Fast connector IP  
L93 043000