

Billet

L10 310A7 _

Technical description

Adjustable LED fitting for floor /wall use and/or with stake complete with bracket, extremely robust , with high IP protection, suitable for pointing lighting for indoor and outdoor use. This fitting is equipped with integrated LED modules.

Body made of aluminium obtained directly from solid, complete with tempered glass soft lens diffuser, without any protusion, stainless steel screws AISI 304. Silicone rubber gasket that ensures a high resistance to water splashes. Paint with high resistance to external agents.

LED light source and colour temperature (4000K Neutral White).

Very high coefficient of rendering >80CRI.

Supply

Driver included.

Input voltage 220-240 VAC/50-60Hz

Temperature -20° +40°

Life 30000h / 25°

Installation




Recessed for outdoor

Size (mm)

42 x 72 x 75

Color

Alluminium **6**

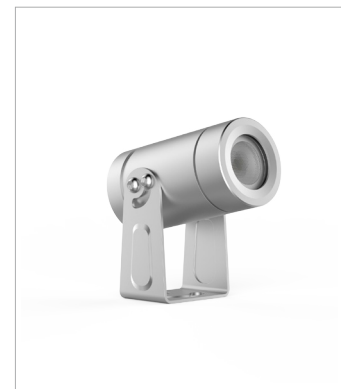

Code	Source	Power	Luminous Flux	Temperature	CRI	Beams	Color
L10 310A7 6	LED	3 W	300 lm	4000 K	>80	30°	Alluminium

Accessories



Stake
L92 011000



Fast connector IP
L93 043000