

Olympia 3

L18 00164 2

Symmetrical - Concentrating
Narrow Beam - IP65

Technical description

Body in die-cast aluminium, UNI 5076 alloy. Anti-loss hinges for the glass in grey thermo-plastic material. Tempered screen printed glass, white colour, sodic-calcic type, 5 mm thick, heat-proof and shock-proof. Reflector in turned, anodized and polished aluminium.

Installation

Industrial outdoor

Size (mm)



480 x 300 x 140

Colour

Grey 2



Code	Source	Power	Current	Connection	Lampada
L18 00164 2	Metal halide vapour	70 W	1 A	RX7s	MD MHN-TD
L18 00164 2	Metal halide vapour	70 W	1 A	RX7s	MD CDM-TD/830

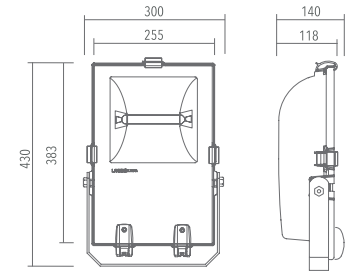


Accessories




Griglia di protezione
Wire guard

Codice / code
L90 01200 0




Raccordo per palo Ø 60mm horizontal
Adaptator for pole Ø 60mm

Codice / code
L92 00500 0



Staffa braccio a sbalzo L: 500mm
Arm bracket L: 500mm

Codice / code
L92 00000 0



Staffa braccio a sbalzo L: 1000mm
Arm bracket L: 1000mm

Codice / code
L92 00100 0



Staffa raccordo per palo Ø 60mm vertical position
Bracket for pole Ø 60mm

Codice / code
L92 00300 0