

# Olympia 3

## L18 00365 2

Symmetrical - Concentrating  
Narrow Beam - IP65

### Technical description

Body in die-cast aluminium, UNI 5076 alloy. Anti-loss hinges for the glass in grey thermo-plastic material. Tempered screen printed glass, white colour, sodic-calcic type, 5 mm thick, heat-proof and shock-proof. Reflector in turned, anodized and polished aluminium.

### Installation

Industrial outdoor

### Size (mm)



480 x 300 x 140

### Colour

Grey 2



Code	Source	Power	Current	Connection	Lampada
L18 00365 2	Metal halide vapour	150 W	1,8 A	RX7s	MD MHN-TD
L18 00365 2	Metal halide vapour	150 W	1,8 A	RX7s	MD CDM-TD/830

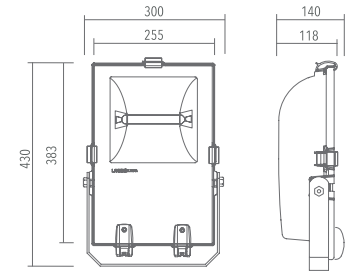


### Accessories




**Griglia di protezione**  
Wire guard  
**Codice / code**  
L90 01200 0



**Raccordo per palo Ø 60mm horizontal**  
Adaptator for pole Ø 60mm  
**Codice / code**  
L92 00500 0



**Staffa braccio a sbalzo L: 500mm**  
Arm bracket L: 500mm  
**Codice / code**  
L92 00000 0



**Staffa braccio a sbalzo L: 1000mm**  
Arm bracket L: 1000mm  
**Codice / code**  
L92 00100 0



**Staffa raccordo per palo Ø 60mm vertical position**  
Bracket for pole Ø 60mm  
**Codice / code**  
L92 00300 0