

Marker 0

L30 310A7 _

Technical description

Fixed LED fitting for recessed floor and/or wall and ceiling use, extremely robust with high IP protection, suitable for direct lighting for indoor and outdoor use. This fitting is equipped with integrated LED modules.

Body and ring in aluminium obtained directly from solid, complete with PMMA optical diffuser and tempered glass that creates a pleasant coplanarity without any protrusion, the silicone rubber gasket ensures a high resistance to water splashes. Aluminium formwork included.

LED light source and colour temperature (4000K Neutral White).

Very high coefficient of rendering >80CRI.

Supply

Driver excluded.

Input voltage 220-240 VAC / 50-60 Hz

Temperature -20° +40°

Life 30000h / 25°

Installation

Recessed for outdoor

Size (mm)



55 x 55 x 88

Colour


Alluminio 6



IP67

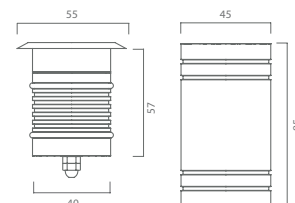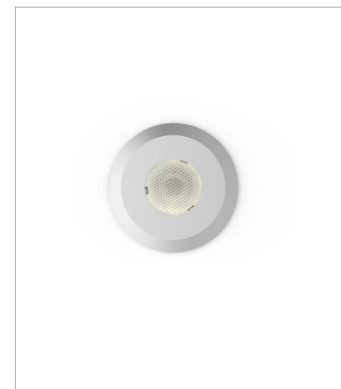

Ø45 mm

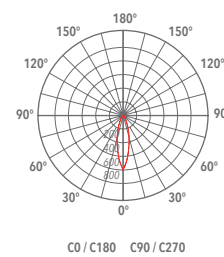

Code	Source	Power	Luminous Flux	Temperature	CRI	Beams	Color
L30 310A7 _	LED	3 W	300 lm	4000 K	>80	30°	Alluminium

Accessories



Kit incasso Cartongesso
Drywall recessed kit
L93 042000



Connettore rapido IP
Fast connector IP
L93 043000