

Fixed L

LDD 307AB _

Technical description


LED fitting for false ceilings, body in die cast aluminium, aluminium reflector with high luminous efficiency.

This fitting is equipped with integrated LED modules.

Body in die-cast aluminium according to the regulations UNI 5076 EN - AB 46100. Optics in anodized aluminium.

LED light source CREE COB and colour temperature (4000K Neutral White).

Very high coefficient of rendering >90CRI.

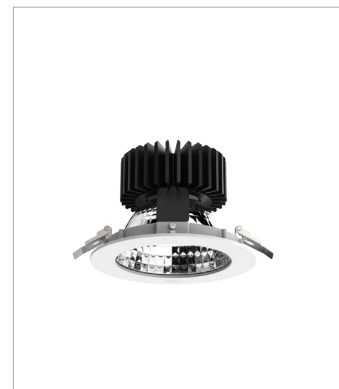

Supply

Remote driver included.

Input voltage 220-240 V AC/50-60Hz

Temperature -20° +40°

Life 30000h / 25°

Installation

Recessed for ceiling.


Size (mm)

160 x 160 x 111

Color

White ☐

Grey ☒



Code	Source	Power	Luminous Flux	Temperature	CRI	Beams	Color
LDD 307AB 1	COB CREE	43 W	2725 lm	4000 K	>90	50°	White
LDD 307AB 2	COB CREE	43 W	2725 lm	4000 K	>90	50°	Grey