

Half Moon

LDG 110A7 _

Technical description

LED fitting for recessed wall. Body in die cast aluminium. Prismatic glass diffuser with high luminous efficiency. This fitting is equipped with integrated LED modules. Body in die-cast aluminium according to the regulations UNI 5076 EN - AB 46100. Prismatic glass diffuser. Thermoplastic formwork included LED light source and colour temperature (2700K). High coefficient of rendering >80CRI.

Supply

Driver included.
Input voltage 220-240 V AC/50-60Hz
Temperature -20° +40°
Life 25000h / 25°

Installation

Recessed wall.

Size (mm)




155 x 55 x 115

Colour

White ☐ 1 Grey ☐ 2 Dark grey ☐ 4

  IP54

Code	Source	Power	Luminous Flux	Temperature	CRI	Beams	Colour
LDG 110A7 1	LED	3 W	250 lm	2700 K	>80	30°	White
LDG 110A7 2	LED	3 W	250 lm	2700 K	>80	30°	Grey
LDG 110A7 4	LED	3 W	250 lm	2700 K	>80	30°	Dark grey

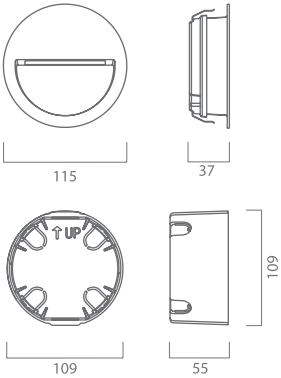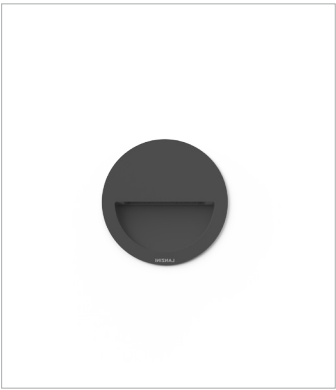

Accessories



Fast connector IP
L93 043000