

# Spot M2

## LE3 304A9 \_

### Technical description

Semi-recessed LED fitting for false ceilings. Body in die cast aluminium. Reflector in anodized aluminium with high luminous efficiency rotation on the vertical axis of 350 °, spot adjustability 50°.

This fitting is equipped with integrated LED modules.

Body in die-cast aluminium according to the regulations UNI 5076 EN - AB 46100. Optics in anodized aluminium.

LED light source CREE COB and colour temperature ( 4000K Neutral White ).

Very high coefficient of rendering >90CRI.

### Supply

Remote driver included.

Input voltage 220-240 V AC/50-60Hz

Temperature -20° +40°

Life 30000h / 25°

### Installation

Recessed / Semi recessed for ceiling.

### Size (mm)



300 x 160 x 155

### Color

White ☐ 1 Grey ☒ 2



IP20

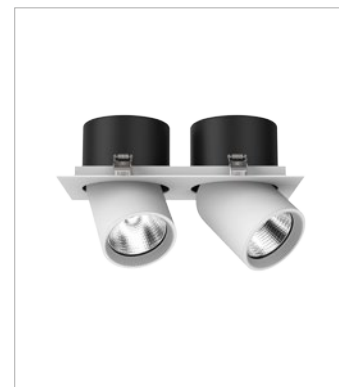


| Code        | Source   | Power  | Luminous Flux | Temperature | CRI | Beams | Color |
|-------------|----------|--------|---------------|-------------|-----|-------|-------|
| LE3 304A9 1 | COB CREE | 2x28 W | 2x2069 lm     | 4000 K      | >90 | 40°   | White |
| LE3 304A9 2 | COB CREE | 2x28 W | 2x2069 lm     | 4000 K      | >90 | 40°   | Grey  |

### Accessori



Barndoors  
L90 019003



Honeycomb louvre  
L90 020003



Anti-glare screen  
L90 021003