

Frame M2

LE8 109A9 _

Technical description

Semi-recessed LED fitting for false ceilings. Body in die cast aluminium. Reflector in anodized aluminium with high luminous efficiency rotation on the vertical axis of 350 °, spot adjustability 45°.

This fitting is equipped with integrated LED modules.

Body in die-cast aluminium according to the regulations UNI 5076 EN - AB 46100. Optics in anodized aluminium.

LED light source CREE COB and colour temperature (2700K).

Very high coefficient of rendering >90CRI.

Supply

Remote driver included.

Input voltage 220-240 V AC/50-60Hz

Temperature -20° +40°

Life 30000h / 25°

Installation

Recessed / Semi recessed for ceiling.

Size (mm)



424 x 220 x 185

Color

White ☐ 1 Grey ☒ 2



IP20

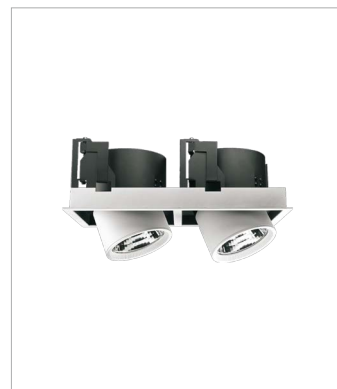

| Code | Source | Power | Luminous Flux | Temperature | CRI | Beams | Color |
|-------------|----------|--------|---------------|-------------|-----|-------|-------|
| LE8 109A9 1 | COB CREE | 2x55 W | 2x4241 lm | 2700 K | >90 | 40° | White |
| LE8 109A9 2 | COB CREE | 2x55 W | 2x4241 lm | 2700 K | >90 | 40° | Grey |