

L3 Bi 2400 mm

LL3BI40BABL_0080

Technical description


LED fitting in extruded aluminum square section, direct mono emission, continuous form without structural interruptions, suitable in pendant version, ceiling, wall and recessed no frame. Polycarbonate diffuser with high luminous efficiency.

Body in die-cast aluminium according to the regulations UNI 5076 EN - AB 46100.

Diffuser in white opaline polycarbonate. (120°).

LED light source and colour temperature (4000 K Neutral White).

Very high coefficient of rendering >90CRI.

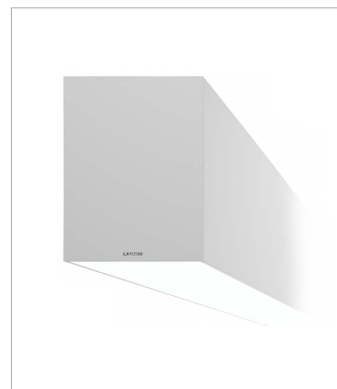

Supply

Driver included.

Input voltage 220-240 V AC/50-60Hz

Temperature -20° +40°

Life 30000h / 25°

Installation

Suspension, ceiling, wall and recessed no frame.

Size (mm)

2400 x 76 x 101

Colour

White 1 Aluminium 6 Black 3

CE IP20 RoHS Flicker Free

Codice	Sorgente	Potenza	Flusso Luminoso	Temperatura	CRI	Ottiche	Colore
LL3BI40BABL10080	LED	80 W	6800 lm	4000 K	>90	120°	White
LL3BI40BABL60080	LED	80 W	6800 lm	4000 K	>90	120°	Aluminium
LL3BI40BABL30080	LED	80 W	6800 lm	4000 K	>90	120°	Black

Accessories

1 BIANCO / WHITE 3 NERO / BLACK 6 ALLUMINIO / ALUMINIUM



Curve form 90°
(300x300)

LKITA00000000080




3-way form
(600x300)

LKITA000000_0081



4-way form
(600x600)

LKITA000000_0082



Retractable mechanical linear joints
LKITA00000000065



Hanging kit 1,5 m
LKITA00000000066



Power kit 1,5 m
LKITA00000000067



Wall mount kit
LKITA00000000085



Endcap
LKITA000000_0087