

Product Name

Q2 Double

(External driver)

Technical description

This fitting is ideal for sport facilities, parkings and industrial areas. Q2 Double is versatile: it can be used both as a suspension and as a ceiling fitting (optional for wall application) thanks to the adjustable bracket fitted with a goniometer. Body in die-cast aluminum alloy UNI EN 1706 (Low copper content) painted polyester powder. Supplied with a painted galvanised steel bracket and goniometer in technopolymer with anti-rotation block in die-cast aluminum and powder painted. Stainless steel screws AISI 304. Tempered glass sodium-calcium type, 5 mm thickness. 91% transparency is guaranteed. Silicone gaskets. LED light source (lumileds), colour temperature (4000 K Neutral White). High coefficient of performance chromatic CRI>80. Optic in optical PC.

Supply

External driver (also in versions dimmable or DALI)
Voltage 230V AC 50Hz.
Temperature -40° +45°

Installation

Wall, ceiling and suspended.

Applications

Sport facilities, commercial areas, industrial areas, production areas, warehouses.

Size (mm)



466 x 505 x 71

Colour

Dark grey **4**

Decay of the luminous flux

≥100.000 hr L85B15

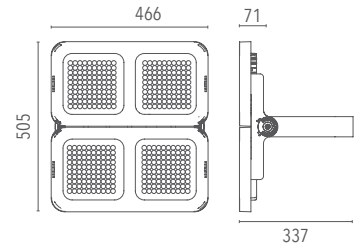

C0 / C180 C90 / C270

Code	Source	Power	Lm (Output)	Lm (Tc=25°)	Temperature	CRI	Beams	Colour	Control
LQ2D04030BL40340	LED	340 W	45298 lm	58140 lm	4000 K	>80	30°	Dark grey	-
LQ2D04030DI40340	LED	340 W	45298 lm	58140 lm	4000 K	>80	30°	Dark grey	Dimmer
LQ2D04030DA40340	LED	340 W	45298 lm	58140 lm	4000 K	>80	30°	Dark grey	DALI

Accessories



Fast connector
IP 2 poles
LKITA00000000017



Fast connector
IP 3 poles
LKITA00000000003



Bracket Kit
Galvanised iron
LKITA00000000043
Inox
LKITA00000000044



Cable with connector
Ca. 2 m., Con 2 poles
LKITA00000000040
Ca. 2 m., Con 3 poles
LKITA00000000041



Wall bracket kit
LKITA00000000062



Laser pointer
support kit
LKITA00000000093

Lanzini indicates the luminous flux of the luminaire in the catalogs with a tolerance of ± 10% respect to the indicated value. The total W indicates the total power absorbed by the LED + power supply system that does not exceed 10% of the indicated value.