

Product Name

# T1 Flat

(External driver)

Technical description

T1 flat corresponds to the perfect identikit of the next generation lighting fitting to replace traditional ones. Body and anti-rotation block made of polyester powder coated aluminum alloy UNI EN 1706 (Low copper content) painted with polyester powder. Polyester powder-coated galvanized steel bracket. Stainless steel screws AISI 304 Glass, on request, tempered glass of sodium calcic type, thickness 4 mm, 91% transparency and IK07. Silicone gaskets.

LED light source (lumileds), colour temperature (4000 K Neutral White).  
High coefficient of performance chromatic CRI>80. Optic in PC optic.

Supply

Driver included external toroidal, dimmable 1-10 V  
Voltage 220-240V AC 50/60Hz.  
Temperature -40° +45°

Installation

Suspended.

Applications

Food production areas, industrial installations, Warehouses and deposits.

Size (mm)



Ø 293 x 72

Colour

Dark grey **4**

Decay of the luminous flux


≥100.000 hr L80B20

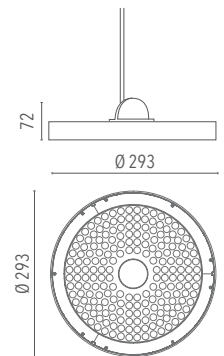

C0 / C180    C90 / C270

Code	Source	Power	Lm (Output)	Lm (Tc=25°)	Temperature	CRI	Beams	Colour	Control
<b>LT1FL4090BL40100</b>	LED	100 W	13831 lm	16800 lm	4000 K	>80	90°	Dark grey	-
<b>LT1FL4090DI40100</b>	LED	100 W	13831 lm	16800 lm	4000 K	>80	90°	Dark grey	Dimmer
<b>LT1FL4090DA40100</b>	LED	100 W	13831 lm	16800 lm	4000 K	>80	90°	Dark grey	DALI

Accessories



Sodic-calcic glass with spacers  
LKITV00000000004



Fast connector IP 2 poles  
LKITA00000000017



Fast connector IP 3 poles  
LKITA00000000003



Kit suspension bracket  
LKITA00000000029



Cable with connector  
Ca. 2m/Co. IP 2 poli  
LKITA00000000040  
Ca. 2m/Co. IP 3 poli  
LKITA00000000041

Lanzini indicates the luminous flux of the luminaire in the catalogs with a tolerance of ± 10% respect to the indicated value. The total W indicates the total power absorbed by the LED + power supply system that does not exceed 10% of the indicated value.