

# Fixed S

## LDB 304A4 \_

### Technical description

LED fitting for false ceilings, body in die cast aluminium, aluminium reflector with high luminous efficiency.  
This fitting is equipped with integrated LED modules.  
Body in die-cast aluminium according to the regulations UNI 5076 EN - AB 46100. Optics in anodized aluminium.  
LED light source CREE COB and colour temperature ( 4000K Neutral White ).  
Very high coefficient of rendering >90CRI.

### Supply

Remote driver included.  
Input voltage 220-240 V AC/50-60Hz  
Temperature -20° +40°  
Life 30000h / 25°

### Installation

Recessed for ceiling.

### Size (mm)



124 x 124 x 101

### Color

White ☐ 1 Grey ☒ 2



IP20

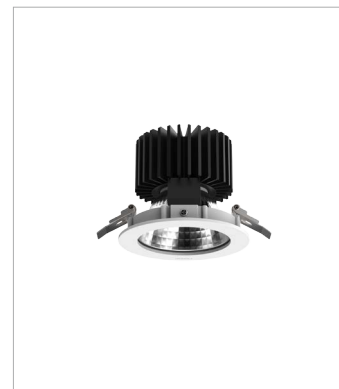

| Code        | Source   | Power | Luminous Flux | Temperature | CRI | Beams | Color |
|-------------|----------|-------|---------------|-------------|-----|-------|-------|
| LDB 304A4 1 | COB CREE | 28 W  | 2173 lm       | 4000 K      | >90 | 20°   | White |
| LDB 304A4 2 | COB CREE | 28 W  | 2173 lm       | 4000 K      | >90 | 20°   | Grey  |