

Fixed S

LDB 305A7 _

Technical description

LED fitting for false ceilings, body in die cast aluminium, aluminium reflector with high luminous efficiency.
 This fitting is equipped with integrated LED modules.
 Body in die-cast aluminium according to the regulations UNI 5076 EN - AB 46100. Optics in anodized aluminium.
 LED light source CREE COB and colour temperature (4000K Neutral White).
 Very high coefficient of rendering >90CRI.

Supply

Remote driver included.
 Input voltage 220-240 V AC/50-60Hz
 Temperature -20° +40°
 Life 30000h / 25°

Installation

Recessed for ceiling.

Size (mm)



124 x 124 x 101

Color

White ☐ 1 Grey ☒ 2



IP20

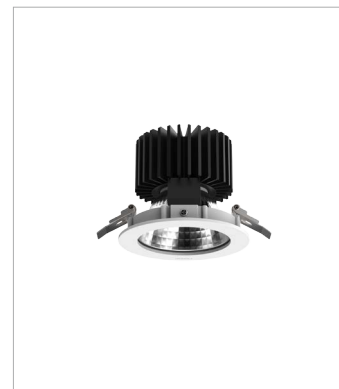

Code	Source	Power	Luminous Flux	Temperature	CRI	Beams	Color
LDB 305A7 1	COB CREE	35 W	2550 lm	4000 K	>90	30°	White
LDB 305A7 2	COB CREE	35 W	2550 lm	4000 K	>90	30°	Grey