

Half Full 2

LDK 314A7 _

Technical description

LED fitting for recessed wall. Body in die cast aluminium. Prismatic glass diffuser with high luminous efficiency.

This fitting is equipped with integrated LED modules.

Body in die-cast aluminium according to the regulations UNI 5076 EN - AB 46100. Prismatic glass diffuser. Thermoplastic formwork included LED light source and colour temperature (4000K Neutral White).

High coefficient of rendering >80CRI.

Supply

Driver included.

Input voltage 220-240 V AC/50-60Hz

Temperature -20° +40°

Life 25000h / 25°

Installation

Recessed wall.

Size (mm)



226 x 70 x 76

Colour

White ☐ 1 Grey ☒ 2 Dark grey ☒ 4



IP54

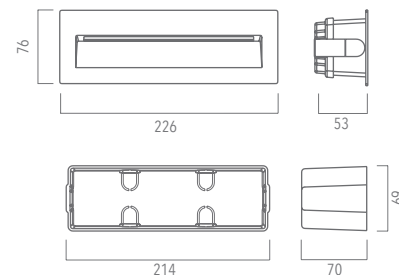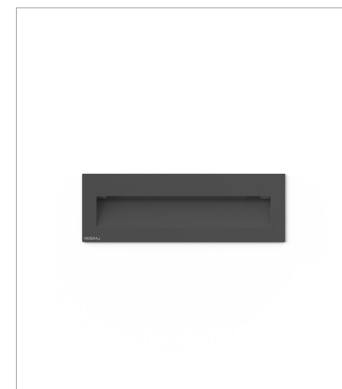

Code	Source	Power	Luminous Flux	Temperature	CRI	Beams	Colour
LDK 314A7 1	LED	6 W	450 lm	4000 K	>80	30°	White
LDK 314A7 2	LED	6 W	450 lm	4000 K	>80	30°	Grey
LDK 314A7 4	LED	6 W	450 lm	4000 K	>80	30°	Dark grey

Accessories



Fast connector IP
L93 043000