

Spot M2

LE3 305AC _

Technical description

Semi-recessed LED fitting for false ceilings. Body in die cast aluminium. Reflector in anodized aluminium with high luminous efficiency rotation on the vertical axis of 350 °, spot adjustability 50°.

This fitting is equipped with integrated LED modules.

Body in die-cast aluminium according to the regulations UNI 5076 EN - AB 46100. Optics in anodized aluminium.

LED light source CREE COB and colour temperature (4000K Neutral White).

Very high coefficient of rendering >90CRI.

Supply

Remote driver included.

Input voltage 220-240 V AC/50-60Hz

Temperature -20° +40°

Life 30000h / 25°

Installation

Recessed / Semi recessed for ceiling.

Size (mm)



300 x 160 x 155

Color

White ☐ 1 Grey ☒ 2



IP20

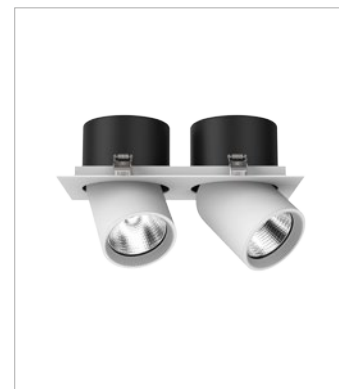


Code	Source	Power	Luminous Flux	Temperature	CRI	Beams	Color
LE3 305AC 1	COB CREE	2x35 W	2x2508 lm	4000 K	>90	55°	White
LE3 305AC 2	COB CREE	2x35 W	2x2508 lm	4000 K	>90	55°	Grey

Accessori



Alette direzionali
Barndoors
L90 019003



Frangiluce nido d'ape
Honeycomb louvre
L90 020003



Schermo antiabbagliamento
Anti-glare screen
L90 021003