

# Frame M2

## LE8 309A9 \_

### Technical description

Semi-recessed LED fitting for false ceilings. Body in die cast aluminium. Reflector in anodized aluminium with high luminous efficiency rotation on the vertical axis of 350 °, spot adjustability 45°.

This fitting is equipped with integrated LED modules.

Body in die-cast aluminium according to the regulations UNI 5076 EN - AB 46100. Optics in anodized aluminium.

LED light source CREE COB and colour temperature ( 4000K Neutral White ).

Very high coefficient of rendering >90CRI.

### Supply

Remote driver included.

Input voltage 220-240 V AC/50-60Hz

Temperature -20° +40°

Life 30000h / 25°

### Installation

Recessed / Semi recessed for ceiling.

### Size (mm)



424 x 220 x 185

### Color

White ☐ 1 Grey ☒ 2



IP20

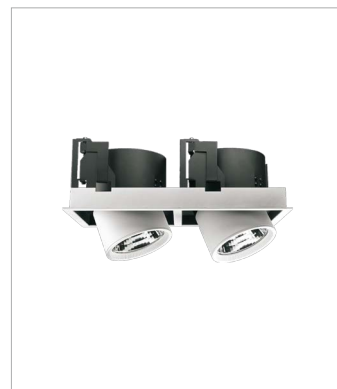

Code	Source	Power	Luminous Flux	Temperature	CRI	Beams	Color
LE8 309A9 1	COB CREE	2x55 W	2x4241 lm	4000 K	>90	40°	White
LE8 309A9 2	COB CREE	2x55 W	2x4241 lm	4000 K	>90	40°	Grey