Product Name

GT

(Integrated driver)

Technical description

GT is a Led appliance designed and built to be the ideal lighting solution for tunnel and underpasses where high performance is required.
Lower body in die-cast aluminum alloy UNI EN 1706 (Low copper content), double painting with polyester powder resistent to the salt fog. Upper body in extruded aluminum, anodised. Screws made of AISI 304 stainless steel. Tempered glass sodium-calcium type, 5 mm thickness, 91% transparency is guaranteed. Silicone gaskets.
LED light source (lumileds), colour temperature (4000 K Neutral White).
High coefficient of performance chromatic CRI≥70-80. Optic optical PC.

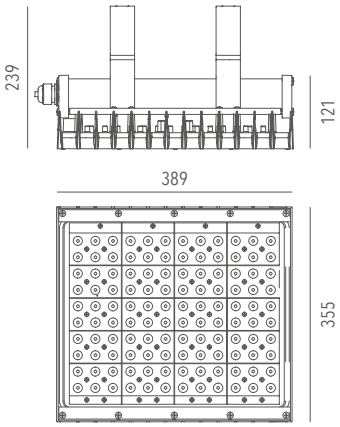

Supply

Integrated driver, DALI communication, External NTC interface temperature control
Input voltage 220 - 240 V AC 50/60 Hz.
Temperature -40° +45°

Installation

Wall and ceiling

Applications

Tunnel, Underpasses

Size (mm)

389 x 355 x 239

Colour

Dark grey 4

Decay of the luminous flux

≥100.000 hr L90B10



IP66 IK08 RG1 IEC 62778 U.V. MAX 8,7 Kg *Low* **Flicker** LED RoHS 05

Code	Source	Power	Lm (Output)	Lm (Tc=25°)	Temperature	CRI	Beams	Colour	Control
L00GT40H4DA40045	LED	45 W	6075 lm	7200 lm	4000 K	≥70-80	H4	Dark grey	DALI

Accessories

Connection kit for slotted cable trays 100 mm
LKITA00000000010

Connection kit for slotted cable trays 200 mm
LKITA00000000011

Connection kit for slotted cable trays 300 mm
LKITA00000000012

Lanzini indicates the luminous flux of the luminaire in the catalogs with a tolerance of ± 10% respect to the indicated value. The total W indicates the total power absorbed by the LED + power supply system that does not exceed 10% of the indicated value.