

Product Name

# 5R2

(External driver)

Technical description

5R2 is the most powerful floodlight in the current Lanzini range and resumes its high innovative capacity combined with excellent luminous efficiency. Body in die-cast aluminum alloy UNI EN 1706 (Low copper content) painted polyester powder. Supplied with a painted galvanised steel bracket. Stainless steel screws AISI 304. Tempered glass sodium-calcium type, 5 mm thickness, 91% transparency is guaranteed. Silicone gaskets. LED light source (lumileds), colour temperature (4000 K Neutral White). High coefficient of performance chromatic CRI>80. Optic in optical PC.

Supply

External driver (also in versions dimmable or DALI)  
Voltage 220-240V AC 50/60Hz.  
Temperature -40° +45°

Installation

Wall, Headlight tower

Applications

Industrial areas, Sport facilities, Assembling areas, Big parking

Size (mm)




1209 x 572 x 370

Colour

Dark grey 4

Decay of the luminous flux

≥100.000 hr L80B20

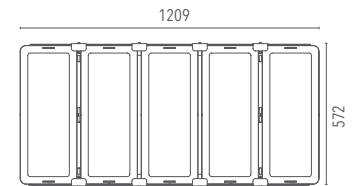

Code	Source	Power	Lm (Output)	Lm (Tc=25°)	Temperature	CRI	Beams	Colour	Control
L05R240900141250	LED	1250 W	167000 lm	210000 lm	4000 K	>80	90°	Dark grey	-
L05R240900241250	LED	1250 W	167000 lm	210000 lm	4000 K	>80	90°	Dark grey	Dimmer
L05R240900341250	LED	1250 W	167000 lm	210000 lm	4000 K	>80	90°	Dark grey	DALI

Accessories



Fast connector IP 2 poles  
LKITA00000000017



Fast connector IP 3 poles  
LKITA00000000003



Fast connector IP 5 poles  
LKITA00000000103

Lanzini indicates the luminous flux of the luminaire in the catalogs with a tolerance of ± 10% respect to the indicated value. The total W indicates the total power absorbed by the LED + power supply system that does not exceed 10% of the indicated value.