

Product Name

# R2

(External driver)

Technical description

This fitting is suitable for wall or ceiling application. R1 is equipped with the latest LED technology that, combined with the choice of different optics, it ensures high performance lighting in the name of energy sustainability. Body in die-cast aluminum alloy UNI EN 1706 (Low copper content) painted polyester powder. Supplied with a painted galvanised steel bracket and goniometer in technopolymer with anti-rotation block in die-cast aluminum and powder painted. Stainless steel screws AISI 304. Silicone gaskets. On request, tempered glass sodium-calcium type, 5 mm thickness, 91% transparency. LED light source (lumileds), colour temperature (4000 K Neutral White). High coefficient of performance chromatic CRI>80. Optic in optical PC.

Supply

External driver (available in dimmable or DALI versions).  
Voltage 220-240V AC 50/60Hz.  
Temperature -40° +45°

Installation

Wall, ceiling and suspended.

Applications

Commercial areas, Industrial areas, Sport facilities, Assembling areas

Size (mm)



562 x 231 x 119

Colour

Dark grey **4**

Decay of the luminous flux

≥100.000 hr L85B15

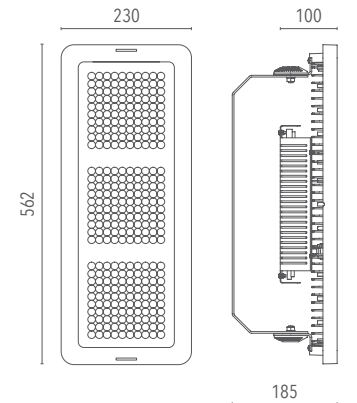

Code	Source	Power	Lm (Output)	Lm (Tc=25°)	Temperature	CRI	Beams	Colour	Control
<b>L00R240A3BL40300</b>	LED	300 W	36545 lm	51300 lm	4000 K	>80	A3	Dark grey	-
<b>L00R240A3DI40300</b>	LED	300 W	36545 lm	51300 lm	4000 K	>80	A3	Dark grey	Dimmer
<b>L00R240A3DA40300</b>	LED	300 W	36545 lm	51300 lm	4000 K	>80	A3	Dark grey	DALI

Accessories



Lanzini indicates the luminous flux of the luminaire in the catalogs with a tolerance of ± 10% respect to the indicated value. The total W indicates the total power absorbed by the LED + power supply system that does not exceed 10% of the indicated value.