

Product Name

# T2

(External driver)

Technical description

T2 is born from the concept of T-Series fittings, from the need to reach high watts while maintaining the characteristic circular shape. Body in die-cast aluminum UNI EN 1706 (Low copper content) alloy with polyester powder coating and eye-bolt in M8 galvanized steel. Tempered glass of sodium calcic type, thickness 5 mm, 91% transparency and IK08 with silicone gaskets. Available on request, epoxy polyester powder coated galvanized steel bracket, technopolymer goniometer. Screws made of AISI 304 stainless steel. Tempered glass of sodium calcic type, thickness 5 mm, 91% transparency on request and IK08. Silicone gaskets. LED light source (lumileds), colour temperature (4000 K Natural White). High coefficient of performance chromatic CRI>80. Optic in PC optic.



Supply

External driver (also in dimmable or DALI versions)  
Voltage 220-240V AC 50/60Hz.  
Temperature -40° +45°

Installation

Wall, ceiling and suspended.

Applications

Industrial installations, Warehouses / deposits, Large storage areas, Heavy industry

Size (mm)



Ø400 x 117

Colour

Dark grey **4**

Decay of the luminous flux

≥100.000 hr L85B15

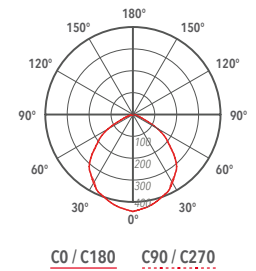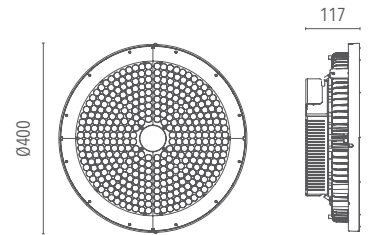

**IP66**
**9,7 Kg**
**Low Flicker ≤3%**

Code	Source	Power	Lm (Output)	Lm (Tc=25°)	Temperature	CRI	Beams	Colour	Control
<b>L00T24090BL40320</b>	LED	320 W	37682 lm	54720 lm	4000 K	>80	90°	Dark grey	-
<b>L00T24090DI40320</b>	LED	320 W	37682 lm	54720 lm	4000 K	>80	90°	Dark grey	Dimmer
<b>L00T24090DA40320</b>	LED	320 W	37682 lm	54720 lm	4000 K	>80	90°	Dark grey	DALI

Accessories



Fast connector  
IP 2 poles  
LKITA00000000017



Fast connector  
IP 3 poles  
LKITA00000000003



Wall/ Ceiling kit  
LKITA00000000016



Cable with  
connector  
LKITA00000000040  
LKITA00000000041



Emergency Kit  
LKITA00000000095

Lanzini indicates the luminous flux of the luminaire in the catalogs with a tolerance of ± 10% respect to the indicated value. The total W indicates the total power absorbed by the LED + power supply system that does not exceed 10% of the indicated value.